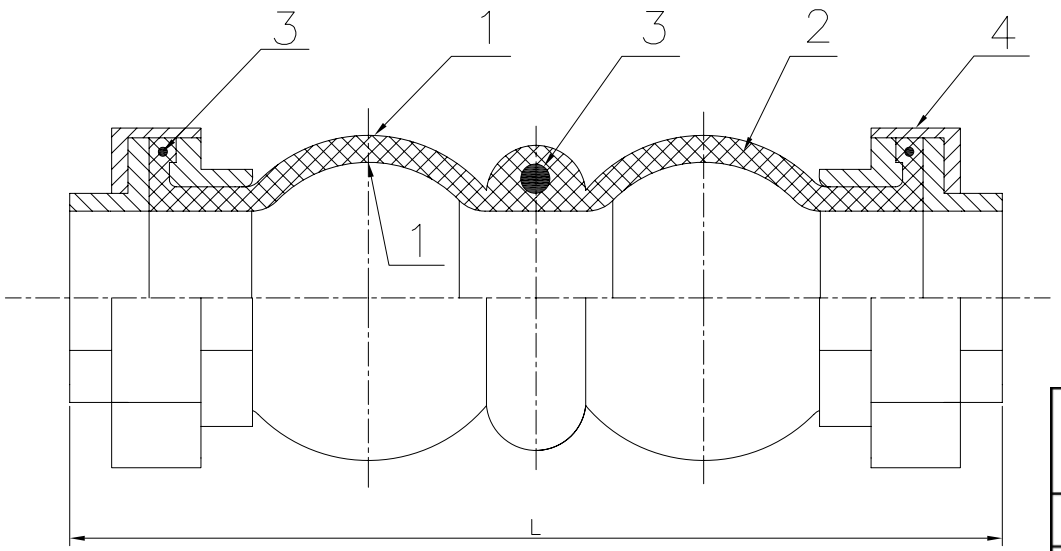

No.	Name	Material
1	Outer/inner rubber	NR
2	Key frame	Cord fabric
3	Pressurized ring	Steel wire strand
4	Screwed	Malleable iron

SIZE	L (mm)	Displacement (mm)			Angle deflection
		Elongation	Compression	Transverse	
DN20	200	6	22	22	30°
DN25	200	6	22	22	30°
DN32	200	6	22	22	30°
DN40	200	6	22	22	30°
DN50	200	6	22	22	30°
DN65	265	6	24	24	30°

Rubber joint		Pressure	PN16
		Standard	BSPT
Mapping			
Checking			