


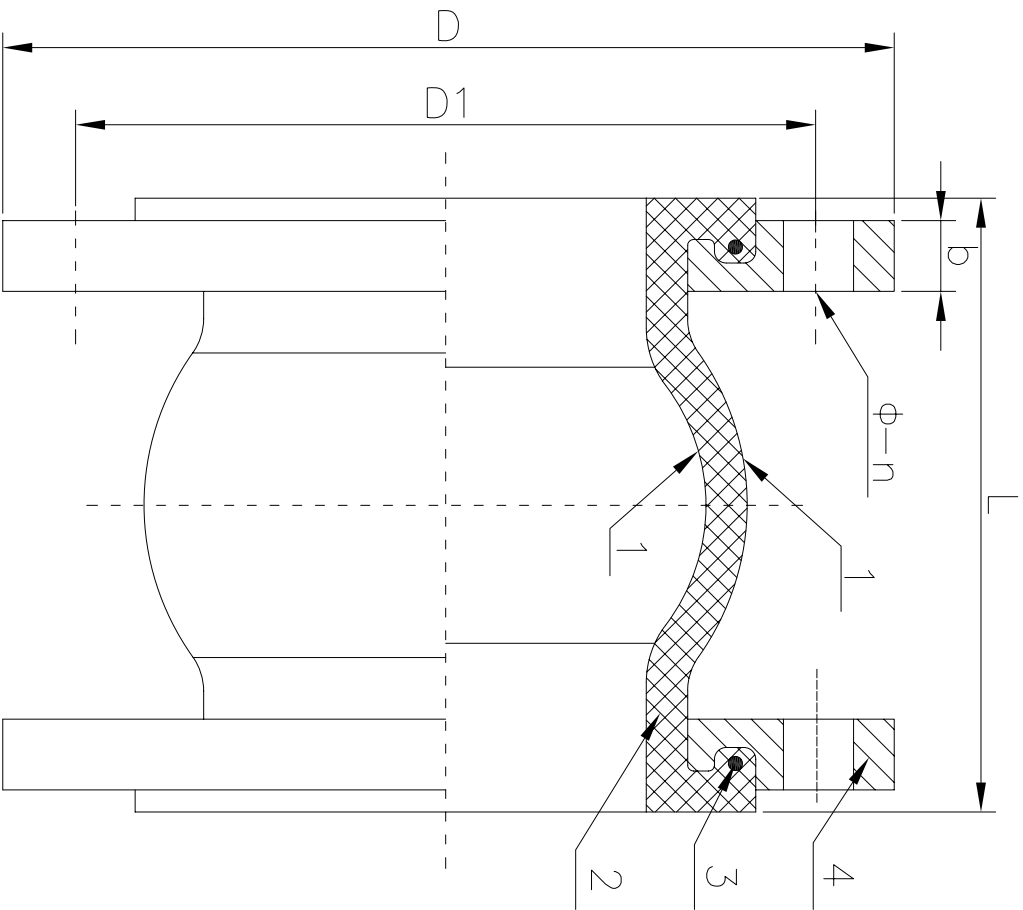

No.	Name	Material
1	Outer/inner rubber	NR
2	Key frame	Cord fabric
3	Pressurized ring	Steel wire strand
4	Flange	Carbon steel

SIZE	L (mm)	D (mm)	D1 (mm)	b (mm)	Φ-n (mm)	Displacement (mm)			Angle deflection
						Elongation	Compression	Transverse	
DN40	95	150	110	16	18-4	6	10	9	15°
DN50	105	165	125	16	18-4	7	10	10	15°
DN65	115	185	145	18	18-4	7	13	11	15°
DN80	135	200	160	20	18-8	8	15	12	15°
DN100	150	220	180	20	18-8	10	19	13	15°
DN125	165	250	210	22	18-8	12	19	13	15°
DN150	180	285	240	22	22-8	12	20	14	15°
DN200	210	340	295	24	22-12	16	25	22	15°

Rubber joint		Pressure	PN16
		Standard	DIN
Mapping			
Checking			