


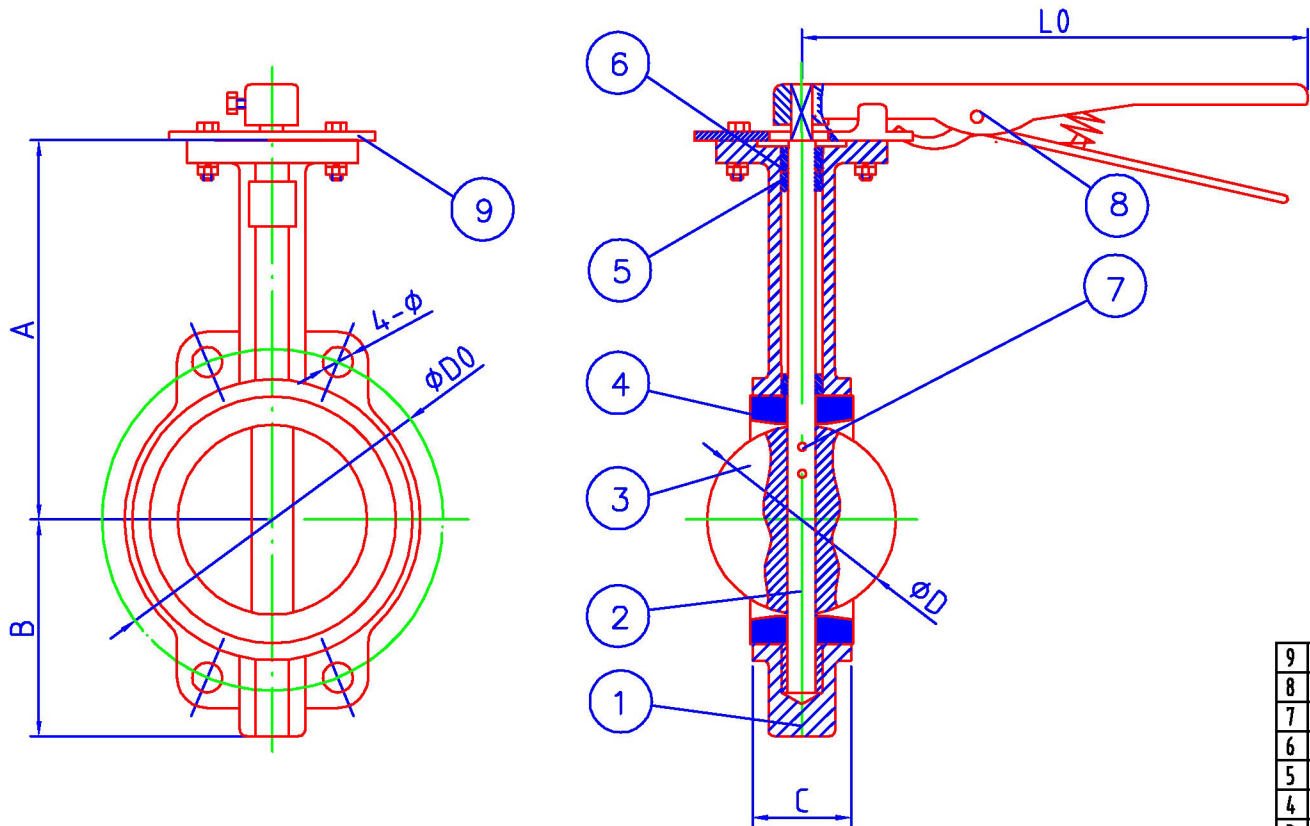

2"	158.7	67.2	42	52.9	218	125	4-18	120.5	4-18
2.5"	163	77	45.8	64.5	222	145	4-18	139.5	4-18
3"	177	91	45.8	78.8	222	160	4-18	152.5	4-18
4"	191.5	104.5	52	104	245	180	4-18	190.5	4-18
5"	207.5	117.5	55	123.3	257	210	4-18	216	4-18
6"	222	132	55.8	155.1	257	240	4-22	241.5	4-22
8"	258	169	61.6	202.5	345	295	4-22	298.5	4-22
SIZE	A	B	C	D	L0	D1(PN10/16)	4- ϕ	D1(25/150LB)	4- ϕ

9	INDICATOR	CARBON STEEL	1	
8	LBVBR	MALLEABLE IRON	1	
7	PIN	STAINLESS STEEL	2	
6	O-RING	BPDM	1	
5	BUSHING	PTFE	4	
4	SBAT	NBR	1	
3	DISC	CF8	1	
2	STEM	SS410	1	
1	BODY	CI	1	
NO.	PARTS NAME	MATERIAL	QTY	

TBST	PRESSURE	SHBLL	SBAL
		HYDROSTATIC	24 kg/cm ²
STAND- ARD	AIR	17.6 kg/cm ²	
		DESIGN CODE	
		BS 5155	
STAND- ARD	FACB TO FACB	INSPECTION & TBST	
		DIN 3230 PART 3	
		BND STANDARD	
STAND- ARD	FACB TO FACB	DIN PN16 /ANSI 125/150	
		DIN 3202 K1	

TITLE :LBVBR WAFBR BUTTFLY VALVB
DN50-DN300

APPROVED		DWG NO.	REV
CHECKED			
DRAWN			
DESIGNED		SCALE	UNIT
			mm